


JinYiYuan 金亿源®

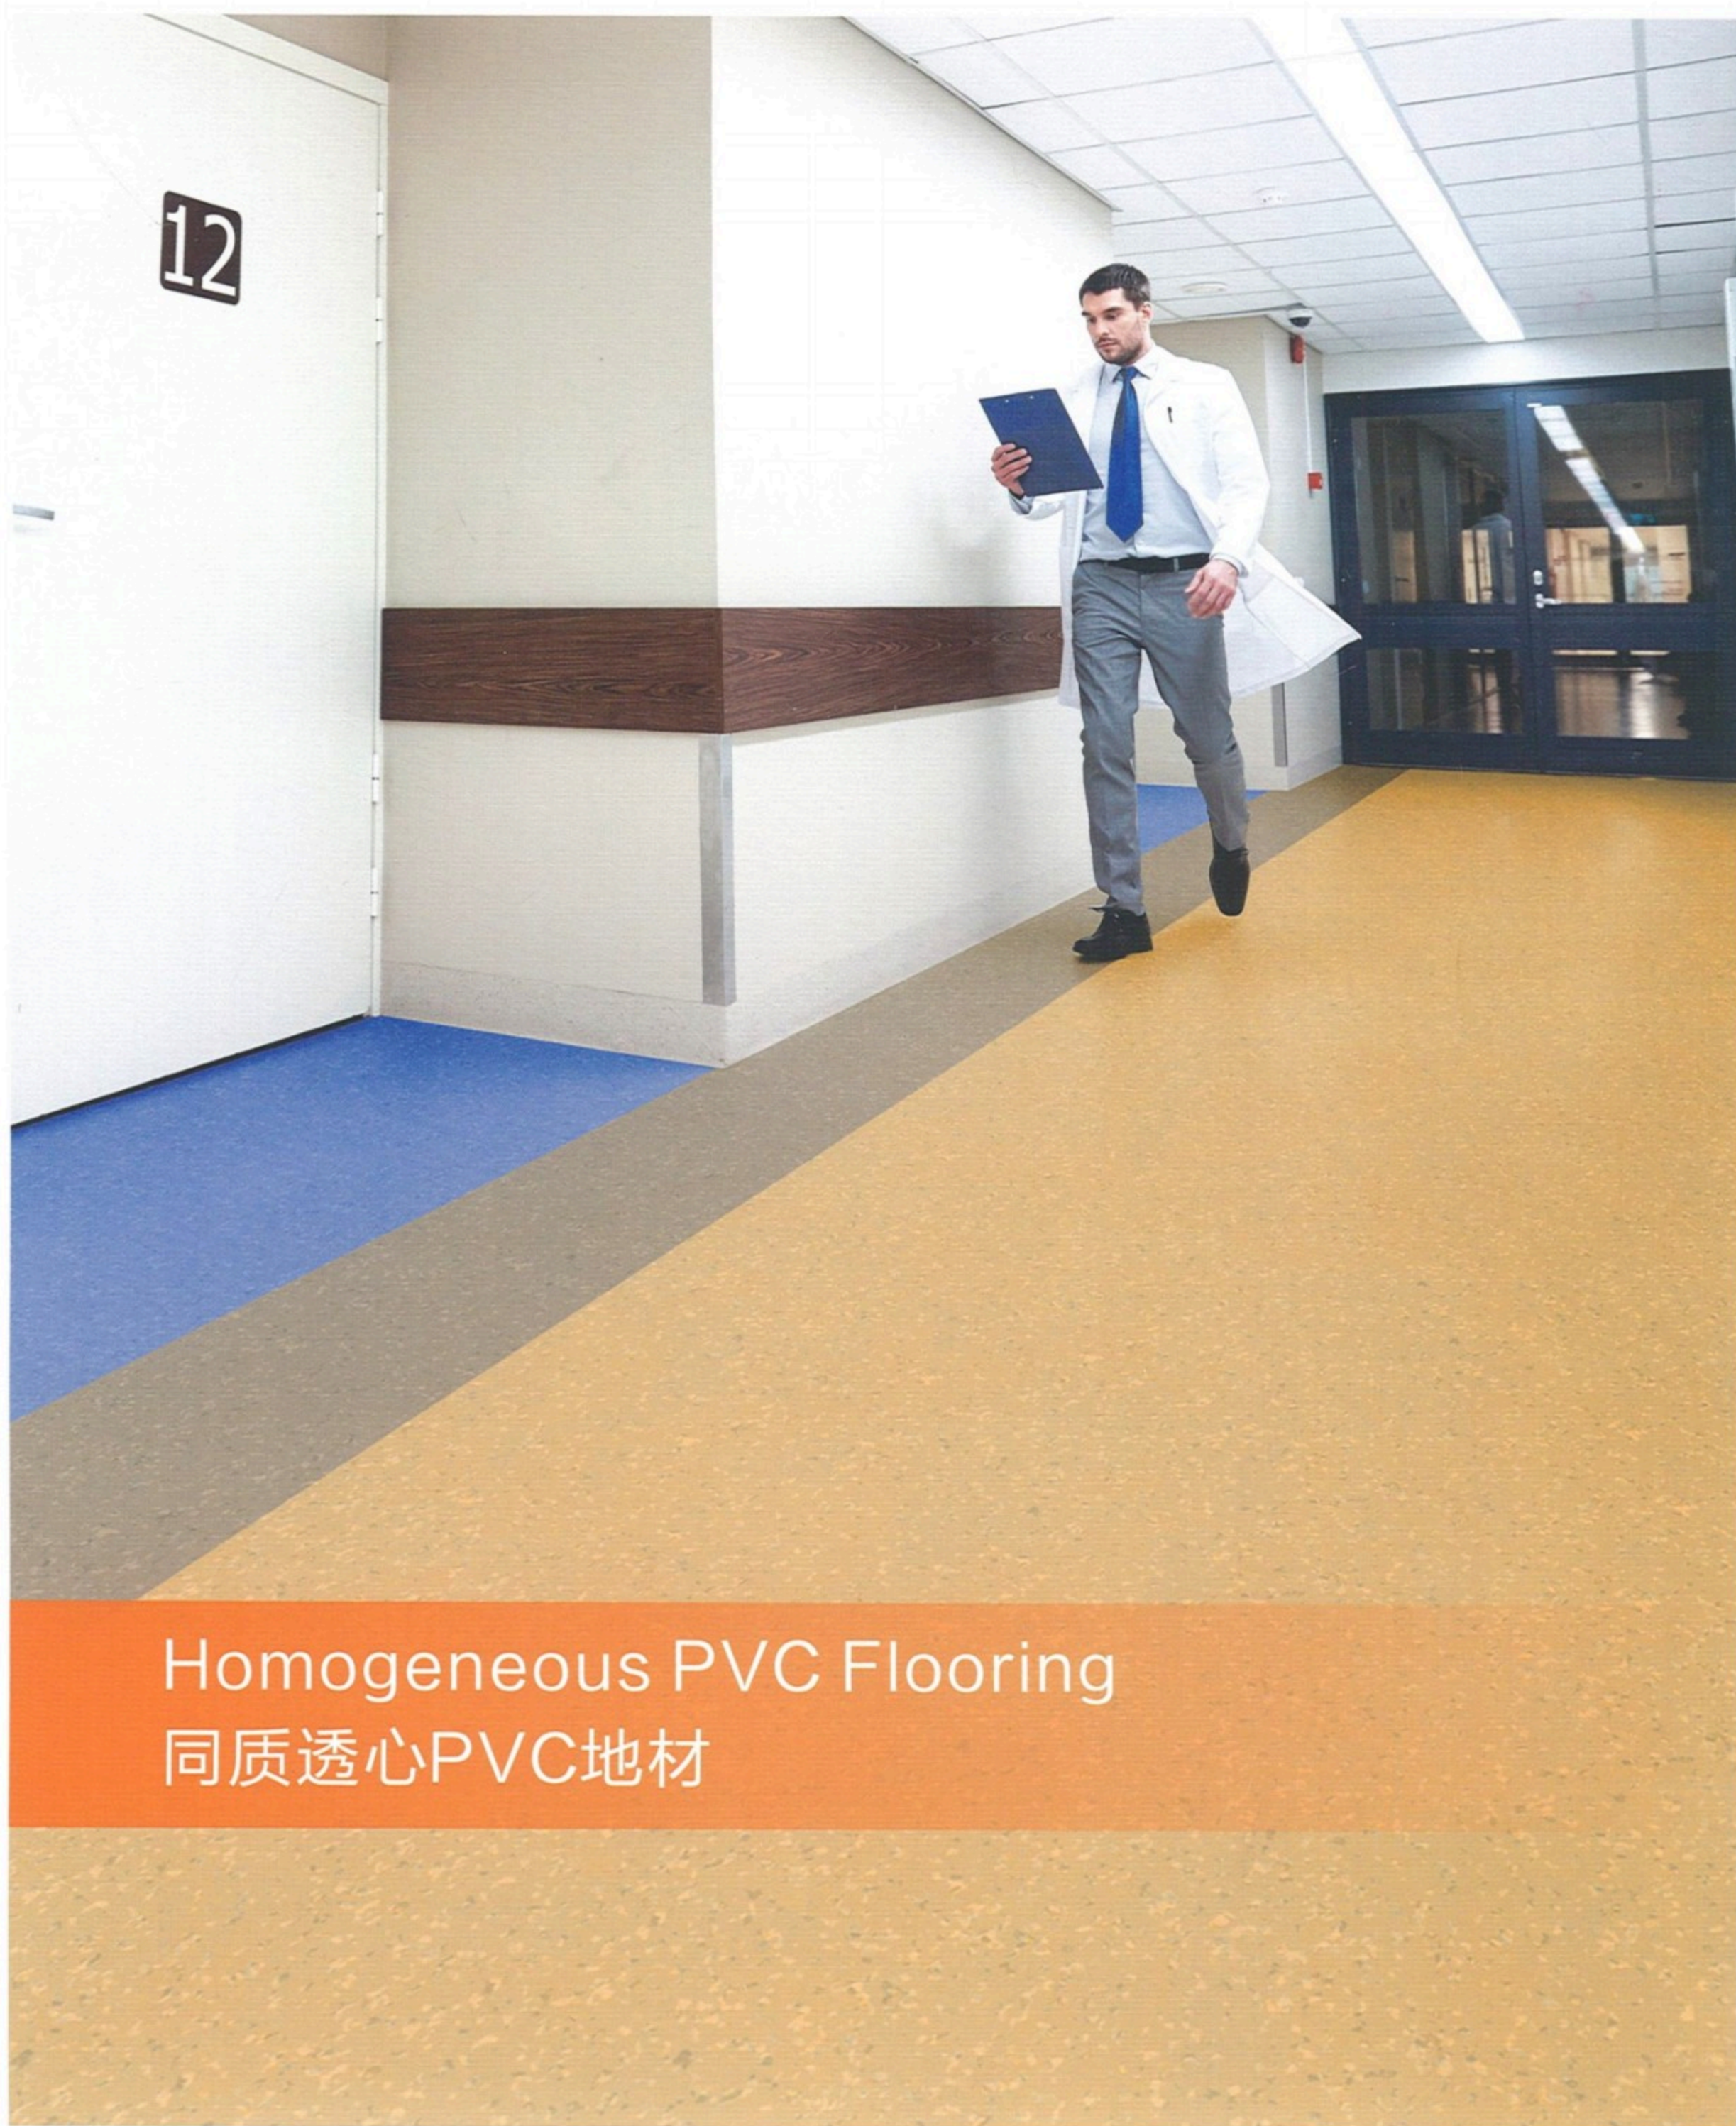

Homogeneous PVC Flooring
同质透心PVC地材

Esprit 精神

Esprit 精神



© 5375 Strawberry red




© 5357 Reed green




© 5368 Boysenberry



© 5385 Cider

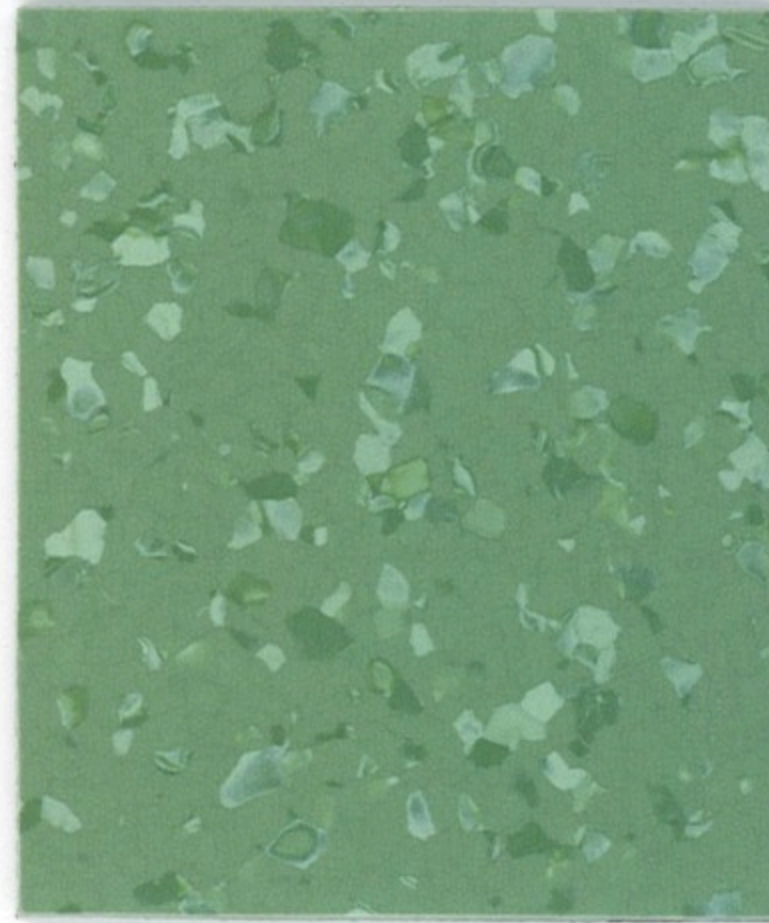

© 5347 Black olive

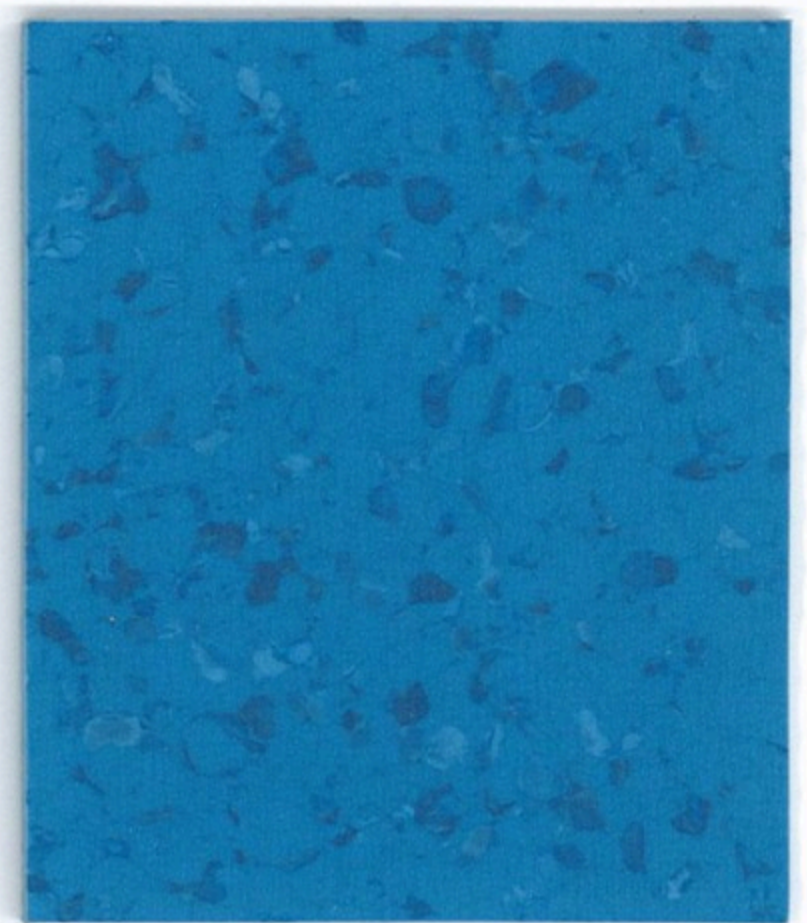

© 5366 Denim



© 5322 Rape yellow



© 5332 Honey



© 5356 Peacock



Environment friendly
安全环保



Waterproof
防水



Anti-slip
防滑



Easy-care
保养方便



Comfortable feel feeling
脚感舒适



Fire retardant
防火



Acoustic
吸音



© 5330

Blue jade




© 5354

Pearl copper



© 5324

Ginger

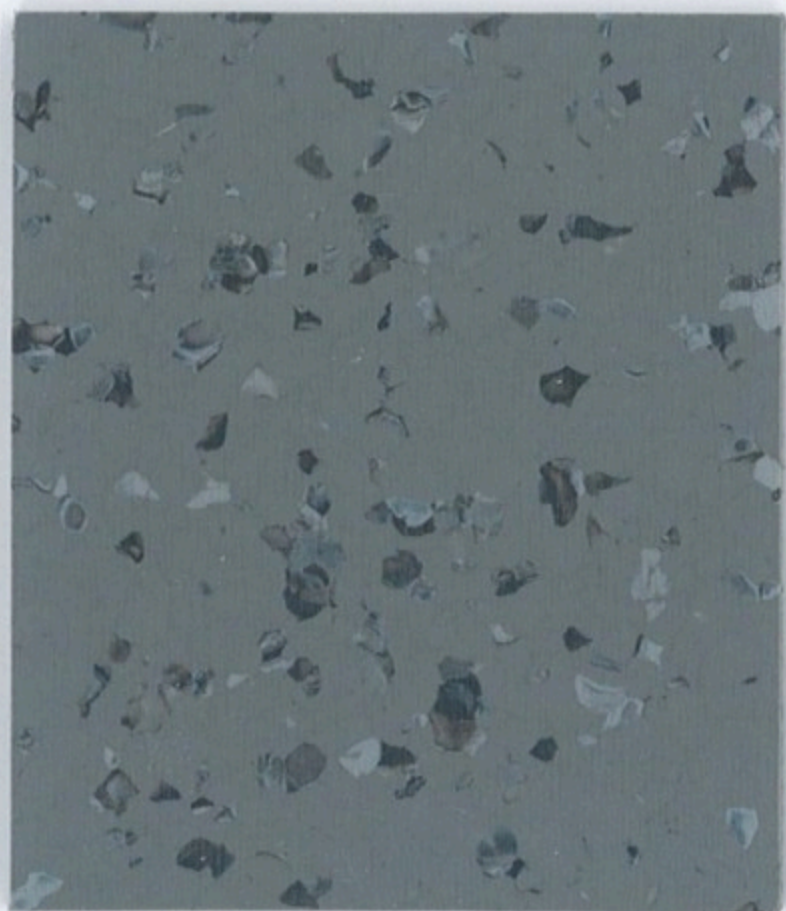

© 5350

Glue blue




© 5341

Crystal Brown



© 5305

Cream

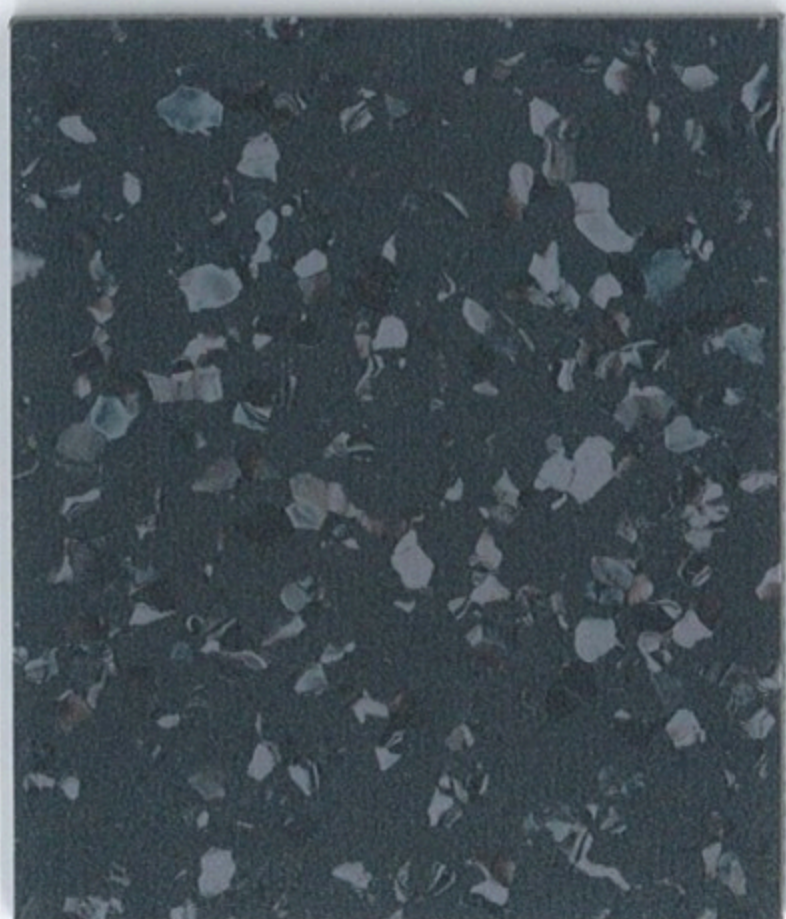

© 5360

Jet black



© 5363

Clay brown




© 5303

Red lilac



Dimension:2.0mmx2.0mx20m

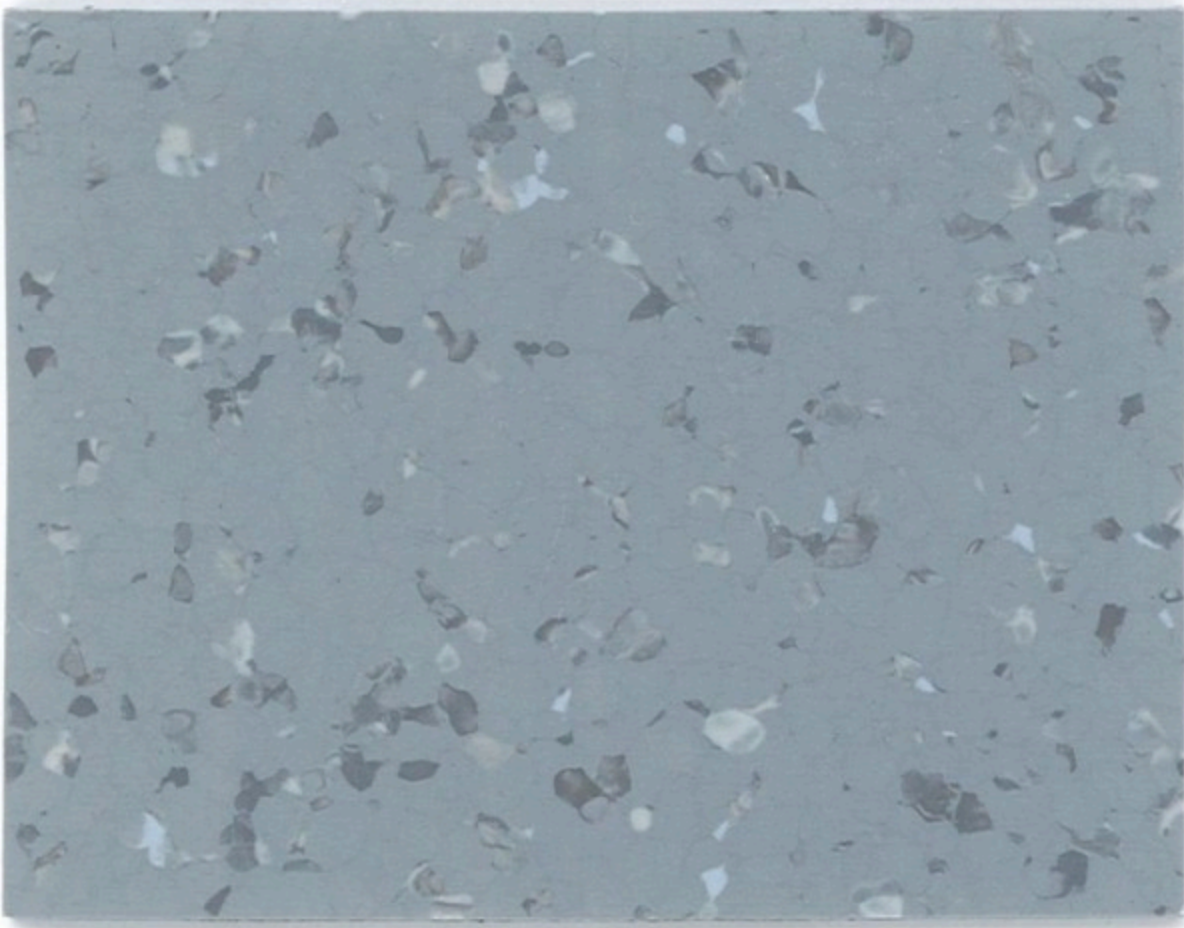


© 5320

Slate




© 5306

Pearl night blue

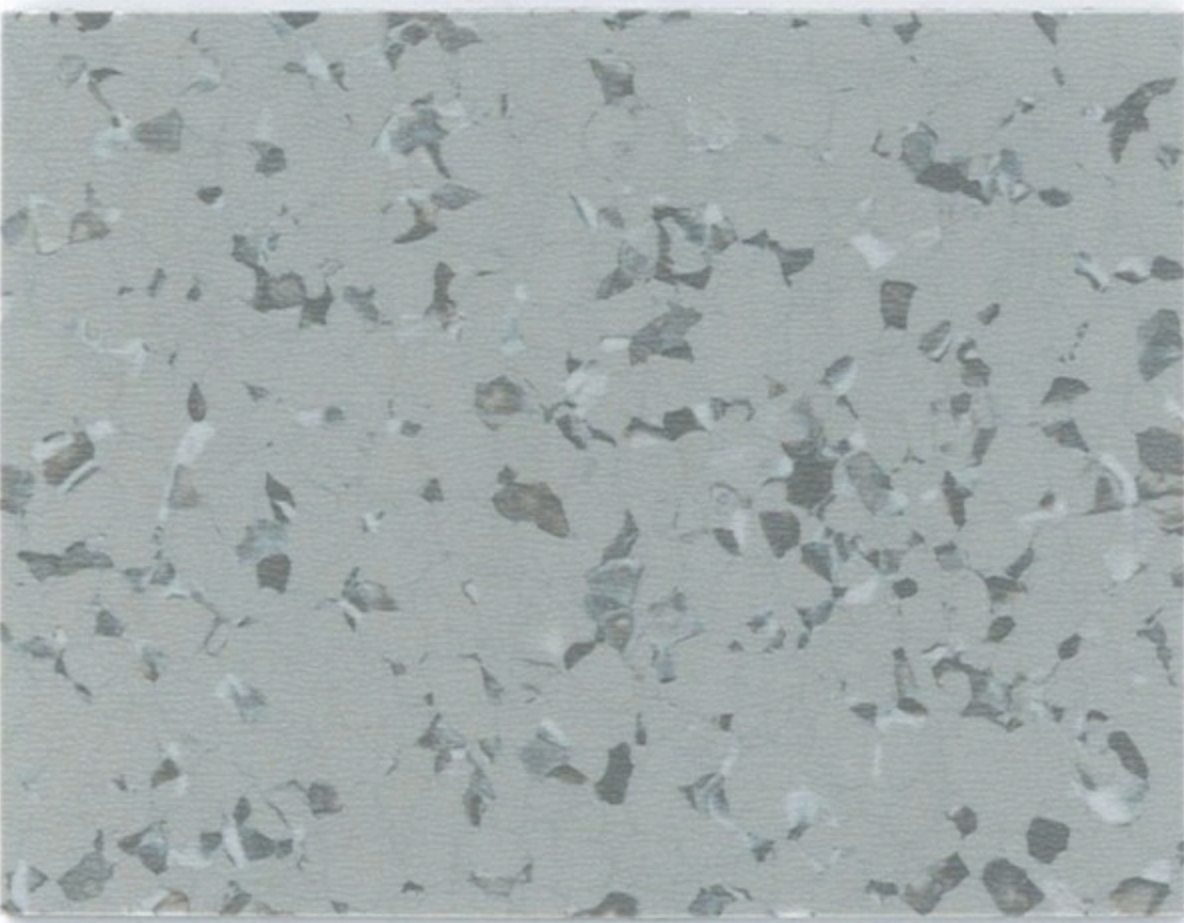


© 5329

Fog

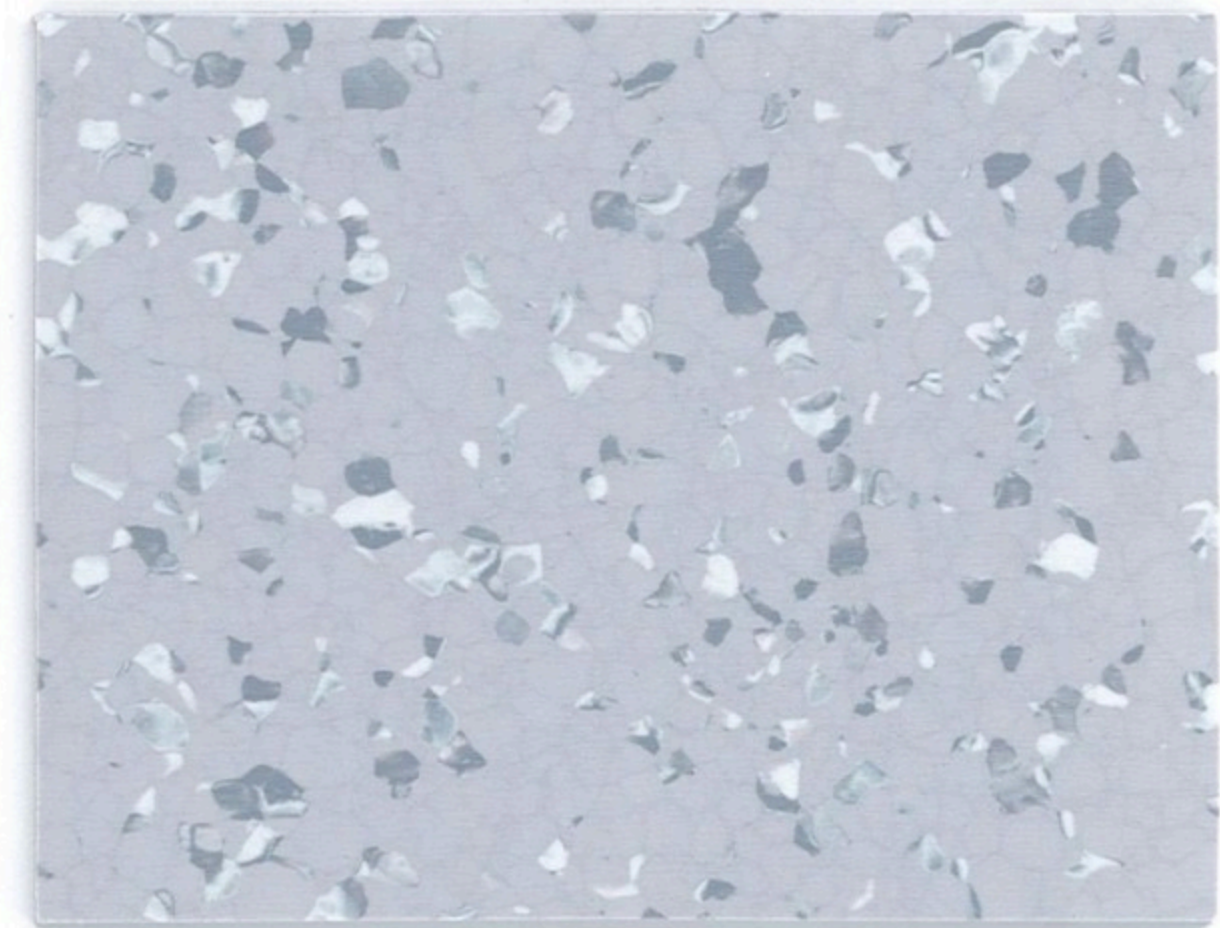


© 5310

Spruce

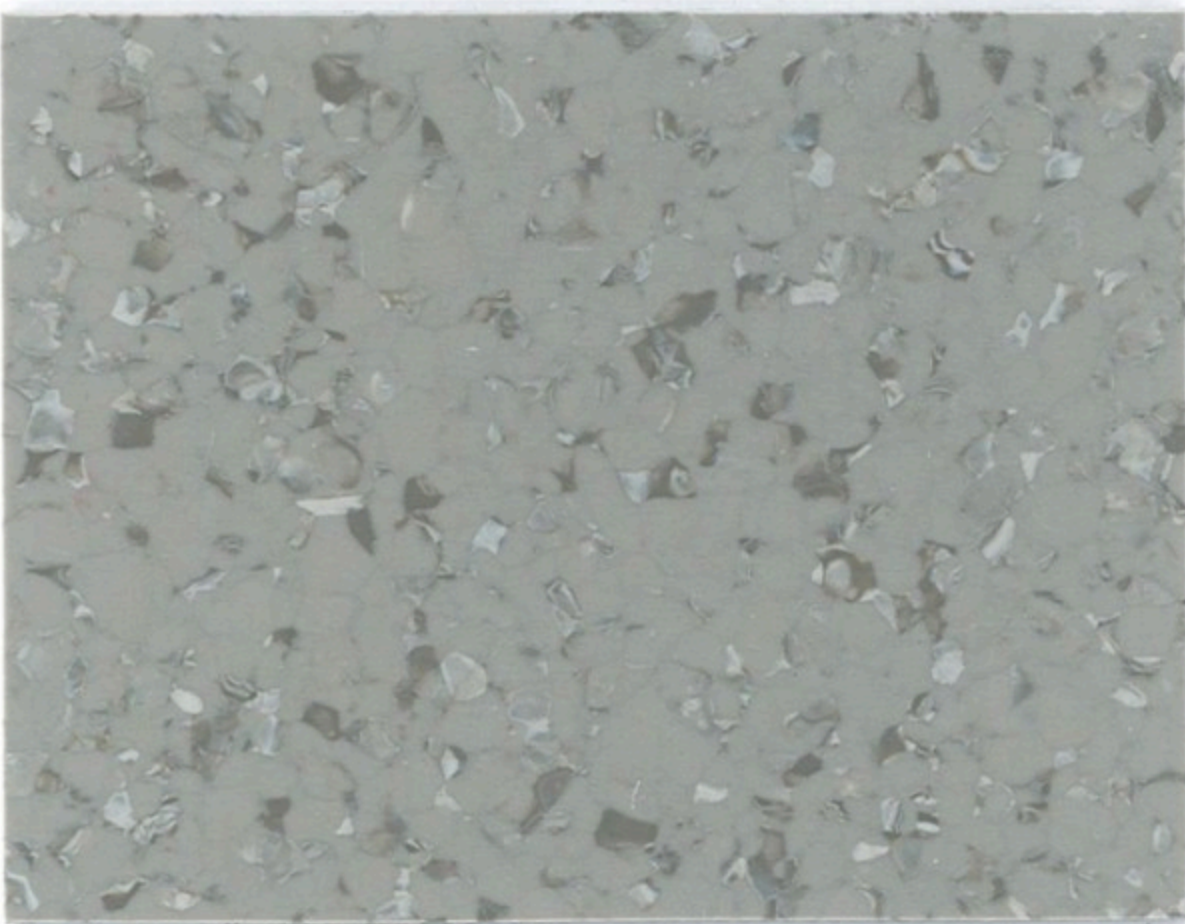

© 5340

Mouse grey

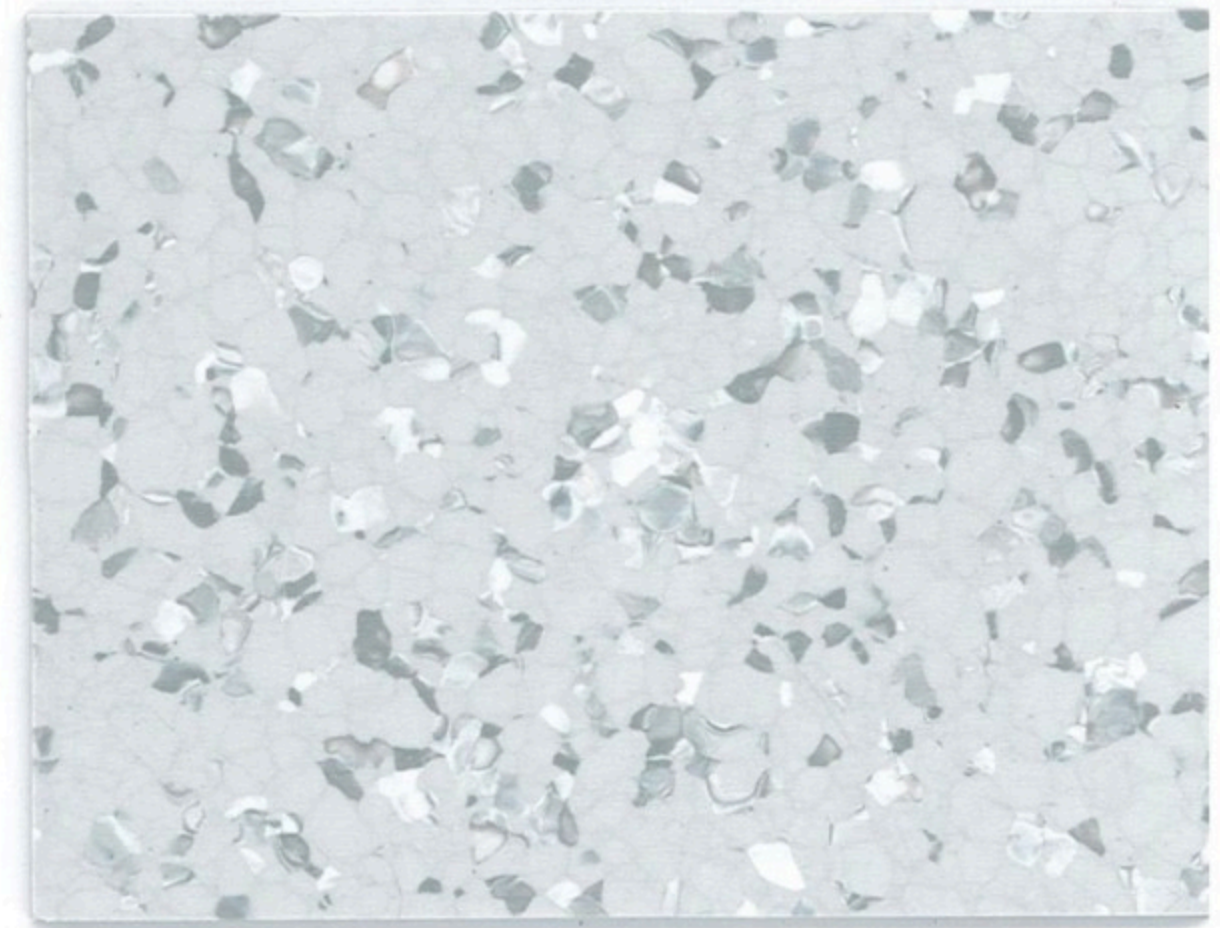

© 5312

Grey aluminum



Esprit 精神



INDOOR AIR QUALITY 室内空气质量

Lower emissions
更低的VOC排放量
Floorscore certified
Floorscore 认证

CE certified
CE 认证
No formaldehyde emission
不含甲醛



RECYCLABILITY 可循环

100% recyclable product
产品100%可回收



RECYCLED CONTENT 成分环保

100% REACH compliant recycled content
100% 符合 REACH 规定



WELLNESS 健康

antibacterial activity
[inhibits growth > 99%]
有效抑菌 [抑菌率 > 99%]

精神具备耐磨、耐压、抗菌、抗化学试剂、清洁保养便利等优异性能。特别适用于极高人流量的商用和工业用场所，包括：医疗系统、教育机构、办公楼、商场、工厂等。

Product Specifications 产品规格

Description 规格	Standard 标准	Unit 单位	Result 结果
Type of flooring 材料类型	EN649		Homogeneous sheet 同质透心卷材
Total Thickness 总厚度	EN428	mm	2.0
Weight 重量	EN430	g/m ²	2900
Width 卷宽	EN426	m	2
Length Sheet 卷长	EN426	m	20

Classification 类别			
Fire rating 防火等级	GB 8624-2012		GB 8624 BI (Bfl-s1)
Toxic testing 国家建材测试	GB 18586-2001		Good 有害物质含量合格
Electrical resistance 抗电阻性	EN1081		> 10 ⁹⁻¹⁰
Slip resistance dry 防干滑性	EN13893		≥0.3
Slip resistance wet 防湿滑性	EN 51 130		R9

Performances 性能			
Abrasion group 耐磨等级	EN660-2		T
Castor wheel test 轮压测试	EN425		Suitable 合格
Color fastness 颜色稳定性	EN 20 105-B02		6
Chemical products resistance 抗化学性	EN423		Good 好
Dimensional stability 尺寸稳定性	EN434	%	≤0.40
Flexibility 柔韧性	EN435		Excellent 优异
Hygiene treatment 清洁性能	MRSA		Very good 良好
Impact sound reduction 行走回声	ENISO717/2		Approx.+4dB
Indentation 压痕性	EN433	mm	≈0.05
Residual indentation 残余凹陷度	EN433	mm	Approx.0.04约等于0.04
Surface treatment 表面处理			PUR



耐污易洁
Pollution prone clean



抗菌防霉
Antibacterial mouldproof



持久亮丽
Lasting bright



金亿源
JinYiYuan

www.chinajinyiyuan.com